Z### FANS" Efficiency and Performance

H30 AC Premium Efficiency H-SERIES | FOR OPEN CEILINGS UP TO 30' HIGH

HVAC SYSTEMS **RUN LESS**

COMFORT GOES UP

OPERATING COSTS GO DOWN

REDUCED CARBON FOOTPRINT

FAST PAYBACK



Fig 1. Innovative Blade Design



Fig 2. Multifunctional Air Guide with Aerodynamic Vanes







ZOO Fans[™] energy-efficient fans create a concise column of air that gently mixes the air from ceiling-to-floor and wall-to-wall. ZOO fans destratify the air, eliminate hot and cold spots, and increase overall air circulation—noticeably improve comfort, and save energy!

H-Series Fans deliver proven efficiency and performance that is unmatched by other fans


- > ZOO fans are the only destratification fans that are independently tested in an industry-certified laboratory for guaranteed performance
- > Variable speed controllable to dial-in comfort, individually, or in zones
- > Easy to control—manually, automatically, or by a building automation system (BAS)
- > Contributes to LEED


Fig 1. Serrations on the trailing edge and winglets on the end of each blade, top-and-bottom, significantly reduce turbulence. The result is a quieter, more efficient, and more productive fan.

Fig 2. ZOO Fans' proprietary stator ring reduces centrifugal and angular flow, straightens the air column, increases air speed, and significantly increases the throw.

DESTRATIFICATION FANS FOR CEILINGS UP TO 30' HIGH

Dimensions

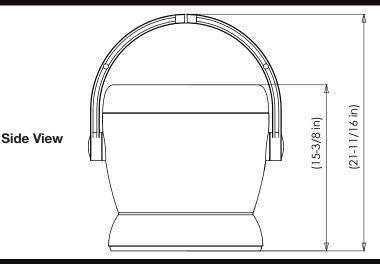




Specifications

Model	H30 Premium Efficiency	
Volts	115	230
Hz	60	50/60
Watts	46	46
Amps	0.44	0.23
CFM	670	670
Wt. (lbs.)	15	15

Fan Speed vs CFM and Power Usage



Sound Level Calculations

Hanging Height	dBA*	
20 feet	44.3	
25 feet	42.4	
30 feet	40.8	
*based on non-reflective area		

Motor

- Composite fan blades with patented design deliver unmatched efficiency
- > Ultra-reliable Ziehl-Abegg® motor with thermal overload protection
- > Sealed, lifetime lubricated bearings

Housing

- > Durable double-wall construction with UV treated, flame resistant plastic
- > Patented design significantly outperforms the competition
- > Intake Safety Grill is standard

Installation Hardware Included

- > 8' Cable with fast-locking Gripple® and attachment hardware
- > 12' Stabilization Tether with fast-locking Gripple and attachment hardware

Coverage

Each fan covers from 1200-2500 sq. ft., depending on the following variables:

- > Ceiling height and square footage
- > Targeted number of air-turns per hour

Options

- > 6' Cord, 3-Prong Plug, 115V only
- > Colors: Off-White or Black
- > Exhaust Safety Grill (additional charge)
- > Controllers (additional charge)

FAQs

- > How many fans for this job?
- > How far apart should the fans be installed?
- > How much will this cost?

Call for your free fan layout and quote.



Call or Click Today!